



Side View

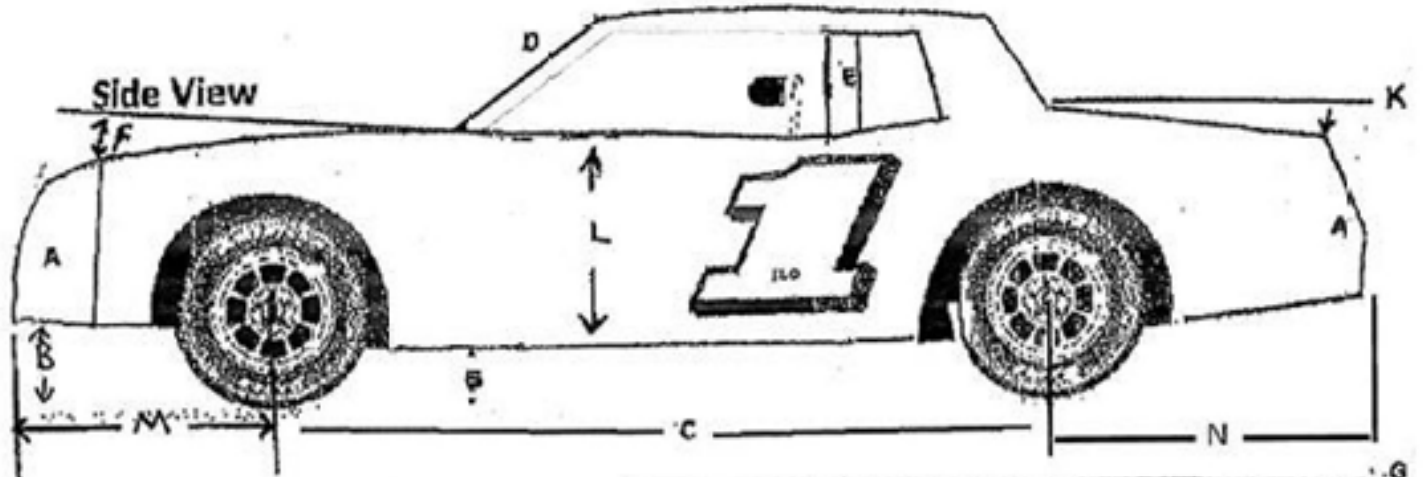

Top View

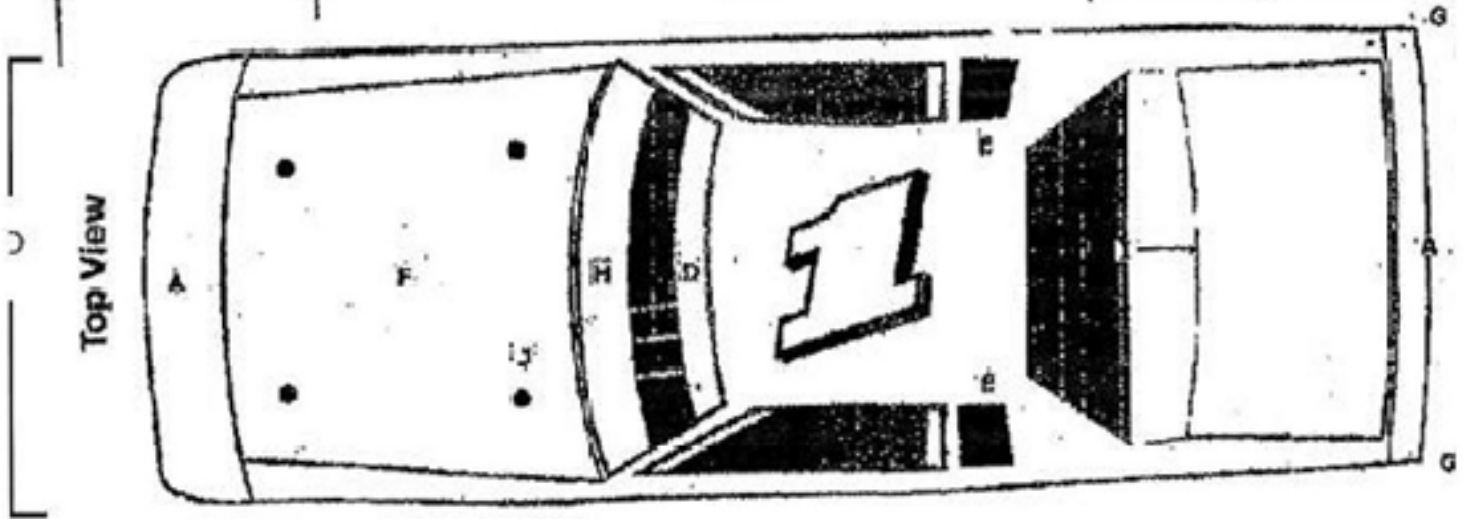

2019 Factory Stock BODY SPECIFICATIONS

- A. Only stock appearing plastic nose and tail pieces are allowed (no late model noses)**
 - B. Minimum 5.5" from the ground**
 - C. Minimum 107.5" wheel base +/- 1/2" side to side**
 - D. Max 7" visor, no side visor on body or cage**
 - E. B pillars must be stock OEM dimension. Side windows must be OEM or a min height of 16.5 +/- 1". Rear side window cannot be closed off. Roof must be stock steel OEM. NO wedge roofs.**
 - F. Stock appearing alum body ok. Hood cannot have more than 5" of rake to the nose. Must look factory.**
 - G. Stock rear bumpers ok, must be tied to the body with 4" flat plate if it's not inside the tail piece. Front bumpers not covered with a plastic nose cannot be wider than the stock frame horns even if it's a stock front bumper.**
 - H. Rear of dash can be no more than 35" from center of the distributor or 28" from the back of the stock hood.**
 - I. Rear deck may only be 8" in front of the center of the rear end.**
 - J. Must have a minimum of 3 windshield bars in front of the driver/and passenger.**
 - K. Trunk and rear quarters must have a min 2" rev rake**
 - L. Any fabricated doors steel or aluminum door height must be a min of 27" and a max of 29".**
 - M. Max 47" from center of spindle to front of nose.**
 - N. Max 50" from center of axle to rear of car.**
 - O. Max 73" Width of body**
 - P. Hood opening has to be at least 42" min centered between frame rails.**
 - Q. Trunk opening has to be at least 42" min centered between frame rails**
- **P&Q** must be compiled with no later than August 10, 2019**